


Lamp Type: GIA1554T9LCA/2S19/4C

Spec Number:


Engineering Specification Sheet

2923

Lamp Diagram:

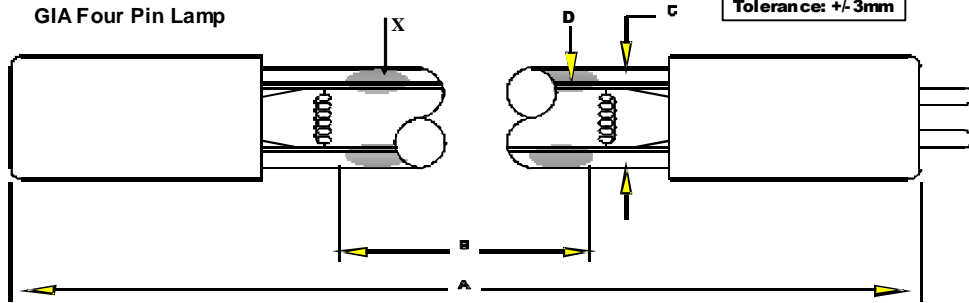


Left Base Diagram:
A208-12-C00 Four Pin Base White w/o Pins

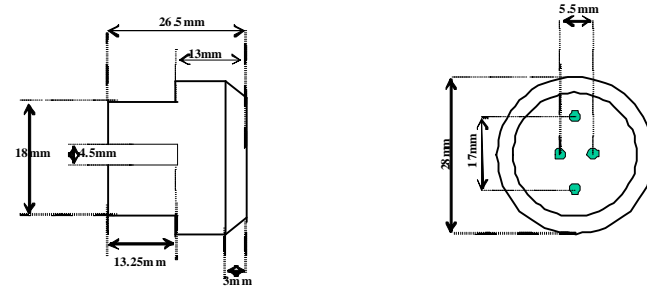

Material: Aluminum - White

Right Base Diagram:

208-CB-018 T9 DB350 Base White
208-PC-018 T9 DB350 Base White Provided with Vendor Pin

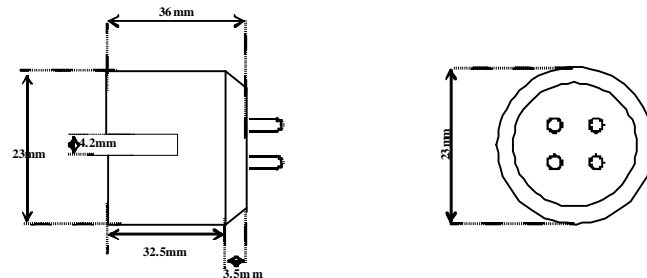

Pin:
A208-12-C00

Lamp Characteristics

(A) Base Face:	1554	mm	+/-3		
(B) ARC:	1483			Operating Current	3.8a
(C) Bulb Diameter:	28			Lamp Voltage:	92v
(X) Amalgam				Lamp Wattage:	350w
Glass Type:	L (Non-Ozone)	Coating:	A11-QC-001		
If Spliced:	L	mm	VH	mm	
(Y)					



UV Output

Output UVC Watts	Output μ /cm ² @ 1 Meter	Rated Life (hrs)	% Output @EOL	Output Notes Field	Ballast Used for Measurements
125	950	12000	80.00%		03-EB-238

First Light
 PO Box 191, 212 Ideal Way
 Poultney, VT 05764 USA
 Phone-(802) 287-4195 Fax-(802) 287-4489
 www.firstlightusa.com
 email: sales@firstlightusa.com

*UV Output is based on lamps measured after 100 hours of operation under lab conditions. These values are subject to wide variations under application/field conditions.
 UV Output is measured at 254 nm
 **Rated Life is for reference purposes only and is based on a group of lamps operating under lab conditions. Actual life depends on the operating conditions of the lamp.

12/20/2011
1:26:52 PM

This data includes matters which are trade secrets of First Light Technologies, Inc., or Proprietary or Confidential to First Light Technologies, Inc. and shall not be reproduced or disclosed in whole or part, or used in any manner except in connection with First Light Technologies, Inc. business, without the written permission of First Light Technologies, Inc.